

## Informationen zum Produkt



## 500Q-M


**Weitere Füllvolumen quadratisch:**  
640ml  
1150ml



Füllvolumen:	Maße:	Höhe o.D.:	Gewicht Becher, Deckel (+/- 3%)	IML-Druck Becher	IML-Druck Deckel	Weiteres:
500ml	99x99mm	85mm	28g / 7g	ja	ja	Siehe Spez.
<ul style="list-style-type: none"> <li>• PP-Spritzgussbecher mit Originalitätsverschluss (Zertifikat Lebensmittelsicherheit)</li> <li>• Standardausführung: klar mit klarem Deckel (Einfärbung in Standard-/Sonderfarben möglich)</li> </ul>						
Menge je Palette Schalen:	in 16 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
10.240 St.	640 St.	580x400x500mm 650g	120g	1200x800x150mm 12kg	2,20m	Siehe Spez.
Menge je Palette Deckel:	in 16 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
20.480 St.	1.280 St.	400x390x300mm 360g	100g	1200x800x150mm 12kg	2,20m	Siehe Spez.

Technical specification:

Tolerance: Weight/Volume +/- 5,0% Dimensions +/- 0,5 mm
---

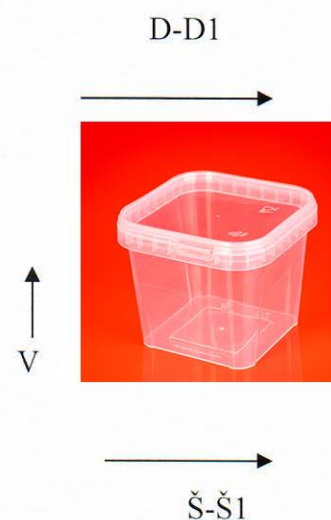

	Container	Lid
Volume up to edge	500ml.	
Material/weight	PP/ 28 g	PP/ 7 g
Top dimension D-D1	D 99,2x99,2 mm	D1 97x97 mm
Bottom dimension Š-Š1	Š 75x75mm	
Height with lid V	V 84,8 mm	6,5mm
Number in 1 ct	640	1280
Number of ct on 1 palette	16	16

Other characteristic

Uses:

containers with lids are intended for direct contact with watery, acidic, fat food products, which temperature is room and lower.

**Hot filling:**

packaging is suitable for contact with the hot filling (85°C-95°C) and short-term use in the microwave. Packaging must be tested by the customer with the actual product before to written approval for use at hot temperatures.

**Cold temperatures:**

packaging made from the special cold-resistant material can be used at temperatures -20°C. It is produced according to customer requirements. Packaging must be tested by the customer with the actual product before to written approval for use at low temperatures.

**Storage:**

suitable storage includes protection of direct sun light, rain, very high temperatures over a long period. Packaging must be not more than 2,4m in height and at least 1m away from heat source.

Recommended period of storage – 12 months after delivery to suitable storage.