

Informationen zum Produkt




S300Q Siegelschale



Füllvolumen:	Maße:	Höhe:	Gewicht Becher, Deckel (+/-3%)	IML-Druck Becher	IML- Druck Deckel	Weiteres:
300ml	99x99mm	54mm	13g / 9g	ja	ja	Siehe Spez.
<ul style="list-style-type: none"> • PP-Spritzguss-Siegelbecher mit Siegelrand (Zertifikat Lebensmittelsicherheit) • Standardausführung: klar mit klarem Deckel (Einfärbung in Standard-/Sonderfarben möglich) 						
Menge je Palette Schalen:	in 24 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
28.800 St.	1.200 St.	580x380x280mm 400g	120g	1200x800x150mm 12kg	2,20m	Siehe Spez.
Menge je Palette Deckel:	in 16 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
15.360 St.	960 St.	400x390x300mm 360g	100g	1200x800x150mm 12kg	2,20m	Siehe Spez.

Technical specification:

Tolerance:
 Weight/Volume +/- 5,0%
 Dimensions +/- 0,5 mm

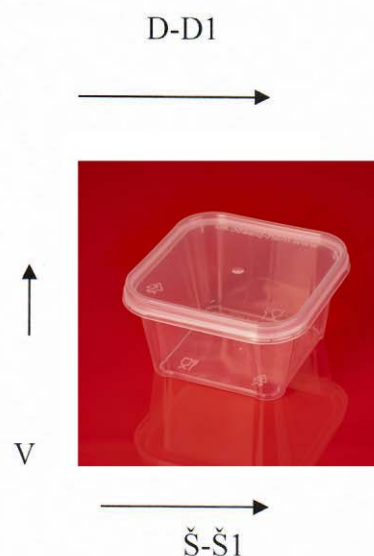

	Container	Lid
Volume up to the edge	300ml.	
Material/weight	PP /13 g	PP/ 9 g
Top dimension D-D1	99x99mm	D1 101x101mm
Bottom dimension Š-Š1	74,7x74,7mm	
Height with lid V	V 54 mm	9,6 mm
Number in 1 ct	1200	960
Number of ct on 1 pal.	24	30
Note: under lid has to be foil, could be used only with foil – without lid		

Other characteristic

Uses:

containers with lids are intended for direct contact with watery, acidic, fat food products, which temperature is room and lower.

Hot filling:

packaging is suitable for contact with the hot filling (85°C-95°C) and short-term use in the microwave. Packaging must be tested by the customer with the actual product before to written approval for use at hot temperatures.

Cold temperatures:

packaging made from the special cold-resistant material can be used at temperatures -20°C. It is produced according to customer requirements. Packaging must be tested by the customer with the actual product before to written approval for use at low temperatures.

Storage:

suitable storage includes protection of direct sun light, rain, very high temperatures over a long period. Packaging must be not more than 2,4m in height and at least 1m away from heat source.

Recommended period of storage – 12 months after delivery to suitable storage.